


Optribution Basic UHF/VHF Link DEV 7238 & DEV 7337

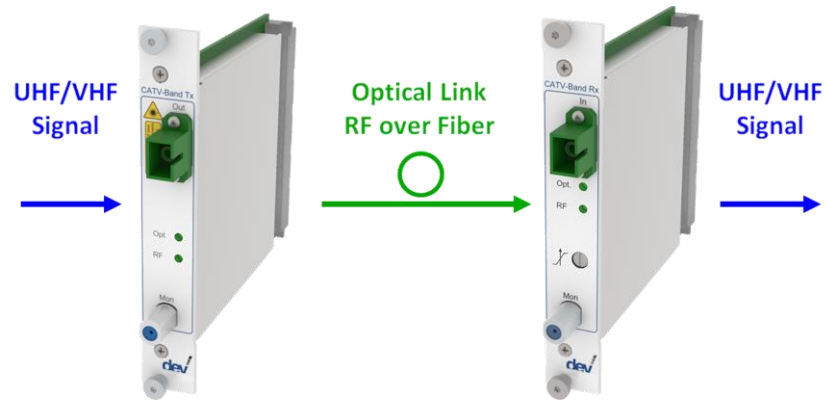

The final product may vary from the above image depending on the options selected.

Products:

DEV 7238 UHF/VHF Optribution Transmitter; 10, 47...1006 MHz;
SC/APC; 1550 nm

DEV 7337 Basic UHF/VHF Optribution Receiver; 47...862 MHz; SC/APC;
with adjustable Slope

Features:

- ▀ Optimized for UHF and VHF Signal Transmission over Fiber
- ▀ RF Sensing Feature for Optical Transmitter (Tx) Module and Optical Receiver (Rx) Module
- ▀ RF Monitoring Port for Tx and Rx Module
- ▀ Adjustable Slope Feature for Rx Module
- ▀ Available Wavelength Options for CWDM Applications
- ▀ Optical Connector Type SC/APC (optional FC/APC or E2000 HRL)

Link Specifications DEV 7238 & DEV 7337

	Value	Condition
Frequency Range	47...862 MHz	
Max. Link Gain	5±3 dB	
Adjustable Slope (Rx Module)	0...18 dB in 1 dB Steps	
Flatness	±1.5 dB ±0.2 dB	47...862 MHz In any 8 MHz window
Return Loss	>14 dB, typ. 16 dB	
Gain Stability	±2.0 dB	0...+50 °C / 32...122 °F
Group Delay Distortion	<2 ns	Notes 2, 3
Nominal RF Input Level	-10 dBm	Aggregated power
Noise Figure	<24 dB	
SFDR _{2/3}	111 dB/Hz ^{2/3}	
CNR	65 dB	Notes 1, 2, 3
Output IP3	>22 dBm	
OP1dB	>+7 dBm	
Intermodulation Distortion	>60 dBc	@ 2 tones, -13 dBm each
Input Power dynamic Range	-59...+1 dBm	Aggregated power
Damage RF Input Level	24 dBm	Aggregated power

Note 1: $P_{in} = -15$ dBm

Note 2: 8 MHz window

Note 3: with back to back fiber connection (2 m) and minimum noise figure

Technical Data DEV 7238 & DEV 7337

	Value	Condition
Common Optical Specifications		
Fiber Type	Single Mode 9/125 μ m	
Optical Connector	SC/APC, E2000/HRL, or FC/APC	Standard is SC/APC
Tx Specifications (DEV 7238)		
Laser Type	DFB	
Laser Class (according to IEC 60 825-1)	Class 1M (low Risk to Eyes, no Risk to Skin)	
Optical Power Output	3 mW / 4.8 dBm	
Available CWDM Wavelengths	1550 nm \pm 10 nm standard, 9 different Wavelengths available	Note 1
Power Consumption	15 V; 200 mA	
Weight	~0.5 kg	
Rx Specifications (DEV 7337)		
Wavelength Range	1100...1650 nm	
Min. optical Input Level (optical Sensitivity)	<-22 dBm	
Damage optical Input Level	+10 dBm	
Power Consumption	15 V; 150 mA	
Weight	~0.3 kg	
Tx & Rx Monitor Port		
Impedance, Connector	75 Ohm, F (f)	
Return Loss	>16 dB typ.	
Insertion Loss / Flatness Monitor Port	= Input Level – 20 dB \pm 2 dB (Tx) = Output Level – 20 dB \pm 2 dB (Rx)	
Tx & Rx RF Sensing		
Adjustable Threshold Level (THL)	0 dBm > THL > -50 dBm	
Threshold Repeatability	<0.1 dB	
Alarm Indication	Via LED on the Front Panel & via Remote Communication	
Tx & Rx General Specification		
Size	4 HP (20 mm) Width, 3 RU (133 mm) Height, 3.94" (100 mm) Depth	
Environmental Conditions	ETS 300019 Part 1-3 Class 3.1E	

Note 1: Please refer to the Order Information section for the available wavelength options.

Order Information

Products																									
DEV 7238	UHF/VHF Optribution Transmitter; 10, 47...1006 MHz; SC/APC; 1550 nm																								
Wavelength Options:																									
	<table border="1"> <thead> <tr> <th>Option</th> <th>Wavelength</th> <th>Option</th> <th>Wavelength</th> </tr> </thead> <tbody> <tr> <td>Lambda 0</td> <td>1310 nm \pm10 nm</td> <td>Lambda 5</td> <td>1550 nm \pm10 nm (standard)</td> </tr> <tr> <td>Lambda 1</td> <td>1470 nm \pm10 nm</td> <td>Lambda 6</td> <td>1570 nm \pm10 nm</td> </tr> <tr> <td>Lambda 2</td> <td>1490 nm \pm10 nm</td> <td>Lambda 7</td> <td>1590 nm \pm10 nm</td> </tr> <tr> <td>Lambda 3</td> <td>1510 nm \pm10 nm</td> <td>Lambda 8</td> <td>1610 nm \pm10 nm</td> </tr> <tr> <td>Lambda 4</td> <td>1530 nm \pm10 nm</td> <td></td> <td></td> </tr> </tbody> </table>	Option	Wavelength	Option	Wavelength	Lambda 0	1310 nm \pm 10 nm	Lambda 5	1550 nm \pm 10 nm (standard)	Lambda 1	1470 nm \pm 10 nm	Lambda 6	1570 nm \pm 10 nm	Lambda 2	1490 nm \pm 10 nm	Lambda 7	1590 nm \pm 10 nm	Lambda 3	1510 nm \pm 10 nm	Lambda 8	1610 nm \pm 10 nm	Lambda 4	1530 nm \pm 10 nm		
Option	Wavelength	Option	Wavelength																						
Lambda 0	1310 nm \pm 10 nm	Lambda 5	1550 nm \pm 10 nm (standard)																						
Lambda 1	1470 nm \pm 10 nm	Lambda 6	1570 nm \pm 10 nm																						
Lambda 2	1490 nm \pm 10 nm	Lambda 7	1590 nm \pm 10 nm																						
Lambda 3	1510 nm \pm 10 nm	Lambda 8	1610 nm \pm 10 nm																						
Lambda 4	1530 nm \pm 10 nm																								
DEV 7337	Basic UHF/VHF Optribution Receiver; 47...862 MHz; SC/APC; with adjustable Slope																								

Optical Connector Options	
Option 07	FC/APC Optical Connector
Option 08	E2000/HRL Optical Connector

Contact

DEV Systemtechnik GmbH
 Grüner Weg 4A
 61169 Friedberg
 GERMANY
 Phone: +49 6031 6975 100
 Fax: +49 6031 6975 114
 info@dev-systemtechnik.com
 www.dev-systemtechnik.com

Rev. 13-Sep-2018

Technical specifications are subject to change